



TDS PRO.
PROFESSIONAL AUDIO SYSTEM
[HTTP://WWW.TDS-PRO.COM](http://www.tds-pro.com)

TS

SERIES

Professional Audio System
会议系列音箱 Conference Speaker Series

TS series include TS206 & TS216. Both two compact full-range loudspeaker equipped purpose-designed 6inch LF driver that

Enable them to match the output of competitive 8inch 2-way design. TS series speaker with high SPL and extremely clear vocal voice.

The unique horn makes it wide coverage angle which enable the installation with more choices. Fast installation flying system save your time and energy.

TS series speaker will be a good helper for your conference room sound reinforcement.

全新的TS会议系列为高输出的全音域扩声系统提供了解决方案，内置高精度分频网络，声音干净，清晰明朗是其最大特点，TS系列音箱具有箱体小，功率大，灵敏度高；中高频明亮，人声通透,适合会议和背景音乐的扩声，背部和侧面配有孔径为100mm托盘固定孔位，其坚固的桦木夹板箱体及多点吊挂，可以采用不同的安装方式，操作简单方便；箱体表面喷有一层水性颗粒漆，防腐，防老化。



TDS PRO.
PROFESSIONAL AUDIO SYSTEM
[HTTP://WWW.TDS-PRO.COM](http://www.tds-pro.com)



TS106

Two-way 6.5" Full Range Speaker

Features:

- ◆ Compression driver with 34mm voice coil.
- ◆ 6.5inch LF transducer for Mid-low range reinforcement.
- ◆ Specially designed crossover.
- ◆ Optional cabinet color finish.

Applications:


- ◆ Conference room.
- ◆ Church, School classroom.
- ◆ Bus station, train station etc.

应用领域:

- 会议室、教堂、剧院、艺术表演中心、游乐园、公共大厅
- KTV中置等补声/延时扩声的应用

技术参数 TECHNICAL PARAMETERS

系统类型 System Type: 2-way 6.5" full range
频率响应 Frequency Response: 80Hz-20KHz ± 3 dB
指向性 Dispersion(H \times V): 90° \times 60°
承受功率 Handling Power: 60W(RMS)/120W(PEAK)
灵敏度级 Sensitivity: 94dB
声压级 MAX.SPL.: 110 dB
标称阻抗 Impedance: 8 ohms
吊挂系统 Suspension: Yes
产品尺寸 Dimensions: W180 \times H350 \times D215(mm)
产品净重 Weight(net): 6kg

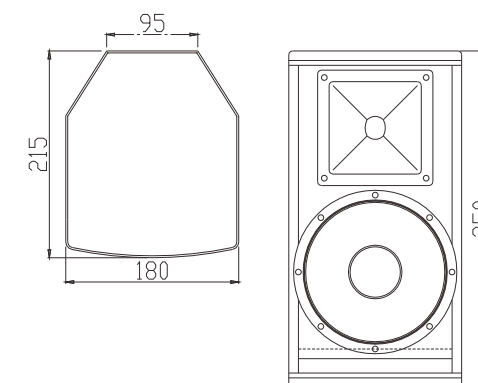

Professional Audio System Conferencing Speaker Series


TS

SERIES





TDS PRO.
PROFESSIONAL AUDIO SYSTEM
[HTTP://WWW.TDS-PRO.COM](http://www.tds-pro.com)

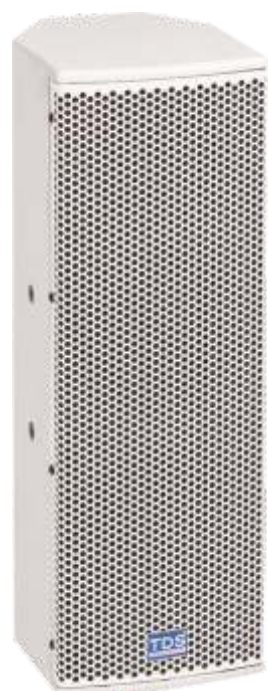

TS206

Two-way 2x6.5" Full Range Speaker

Features:

- ◆ Compression driver with 34mm voice coil.
- ◆ Dual 6.5inch LF transducer for Mid-low range reinforcement.
- ◆ Specially designed crossover.
- ◆ Optional cabinet color finish.

Applications:


- ◆ Conference room.
- ◆ Church, School classroom.
- ◆ Bus station, train station etc.

应用领域:

- 会议室、教堂、剧院、艺术表演中心、游乐园、公共大厅
- KTV中置等补声/延时扩声的应用

技术参数 TECHNICAL PARAMETERS

系统类型	System Type: 2-way 2 x 6.5" full range
频率响应	Frequency Response: 80Hz-20KHz \pm 3 dB
指向性	Dispersion(H \times V): 90° \times 70°
承受功率	Handling Power: 120W(RMS)/240W(PEAK)
灵敏度级	Sensitivity: 96 dB
声压级	MAX.SPL.: 116dB
标称阻抗	Impedance: 16 ohms
吊挂系统	Suspension: Yes
产品尺寸	Dimensions: W180 \times H540 \times D215(mm)
产品净重	Weight(net): 12kg

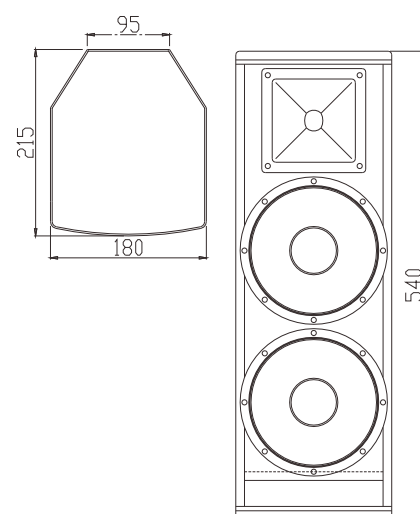

TDS PRO.
PROFESSIONAL AUDIO SYSTEM
[HTTP://WWW.TDS-PRO.COM](http://www.tds-pro.com)



EON15

Two-way 15" Active System

Features

- ◆ Compression driver with 1inch Titanium Dome
- ◆ 15inch power transducer with 75mm voice coil.
- ◆ 129 dB Max SPL.
- ◆ 2 side handles and 1 top handle convenient for transportation.
- ◆ Multi angle enclosure for main or monitor applications.
- ◆ Highly designed composite enclosure for lightweight and durability.

Applications

- ◆ Compact live sound reinforcement system.
- ◆ Theatres, theme parks, houses of workshop.
- ◆ Mobile live performance.
- ◆ Stage monitoring.
- ◆ Everywhere you need to heard.

应用领域:

- 会议室、教堂、剧院、艺术表演中心、游乐园、公共大厅等

技术参数 TECHNICAL PARAMETERS

系统类型	System Type: 2-way 15" active system.
频率响应	Frequency response: 42Hz - 18 KHz \pm 3dB
分频点	Crossover frequencies: 1800 Hz.
声压级	Maximum SPL: 129dB.
功放功率	Power Supply: 500W
高频功率	HF Power amp: 150Watt
低频功率	LF Power amp: 350Watt
指向性	Horizontal coverage angle: 100° Vertical coverage angle: 60°
接线方式	Connectors: XLR-JACK/XLR.
产品尺寸	Dimensions: W 438 x H 685 x D366(mm)
箱体材质	Cabinet material: Composite PP
产品净重	Weight(net): 18 kg

Professional Audio System Active Speaker Series

EON
SERIES

