



**TDSPRO.**  
PROFESSIONAL AUDIO SYSTEM  
[HTTP://WWW.TDS-PRO.COM](http://www.tds-pro.com)

# TD

## SERIES

Professional Audio System  
同轴系列音箱 Coaxial Speaker Series

TD coaxial series speaker delivers amazing sound quality parallel highest demand of professional sound reinforcement requirement. The TD10, TD12, TD15 all with high efficiency coaxial transducers, which working with designed cabinet enable their extremely performance. TD series speaker popular both in fixed installation and rental production market such as conference room, coffee bar, stage monitor and distributed systems.

The U shape flying system ensure its installation safety and easily. We sure once you choice them, you will love them.

TD同轴系列采用点声源技术，从而很好的解决了相位偏差的问题，即高低音在同一个轴点上发声，在性能上表现为辐射的声音有高度的相位保真度，能实现标准的点声源重放（自然界中声音均以点声源形式表现）。声相定位准确，音乐解晰高，中频明亮通透，高频细腻而富有穿透力是其一大特点。再加之高质量单元配置，内置高精密分频网络，高强度夹板箱体，简易方便的多种吊挂方式（U型吊挂装置可调角度，可用支撑架支撑），使其成为多种扩声场所的最佳选择。

TD同轴系列应用领域：用于全音域扩声、语言会议系统、高级KTV包房、慢摇吧；多功能厅、高级酒店会所；流动商演、乐队扩声、舞台返送、前区补声、楼座补声等。



**TDSPRO.**  
PROFESSIONAL AUDIO SYSTEM  
[HTTP://WWW.TDS-PRO.COM](http://www.tds-pro.com)



## TD10

### Two-way 10" Coaxial Loudspeaker

#### Features:

- ◆10inch high quality coaxial transducer.
- ◆Compact birch plywood cabinet.
- ◆Extremely clear vocal voice reinforcement.
- ◆Multifunction installation rigging spare parts.

#### Applications:


- ◆Conference room, Classroom, Coffee bar.
- ◆Small live performance.
- ◆Church, bus station etc.

#### 应用领域：

- 用于全音域扩声、语言会议系统、高级KTV包房、慢摇吧
- 多功能厅、高级酒店会所
- 流动商演、乐队扩声、舞台返送、前区补声、楼座补声等

#### 技术参数 TECHNICAL PARAMETERS

系统类型	System Type: 2-way 10" full range
频率响应	Frequency Response: 75Hz-20KHz $\pm 3$ dB
指向性	Dispersion(H $\times$ V): 90° Axi-Symmetric
承受功率	Handling Power: 250W(RMS)/500W(PEAK)
灵敏度级	Sensitivity: 96 dB
声压级	MAX.SPL.: 121 dB
标称阻抗	Impedance: 8 ohms
吊挂系统	Suspension: Yes
产品尺寸	Dimensions : W346 $\times$ H410 $\times$ D330(mm)
产品净重	Weight(net): 15kg

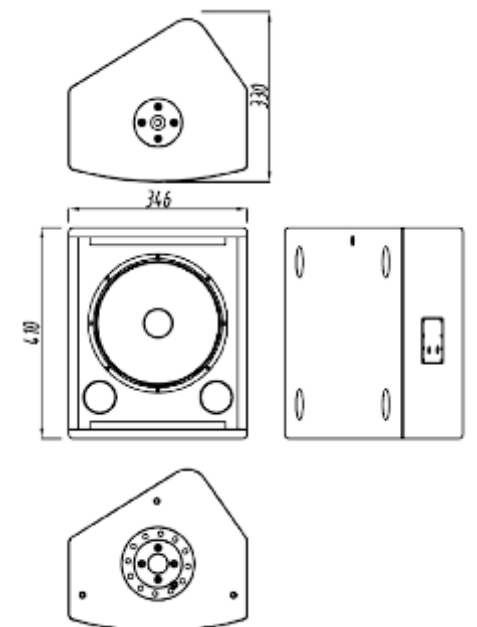

Professional Audio System coaxial Speaker Series

# TD

## SERIES







## TD12

### Two-way 12" Coaxial Loudspeaker

#### Feature:

- ◆ High quality 12inch coaxial transducer.
- ◆ Extremely clear vocal voice reinforcement.
- ◆ Multifunction installation rigging spare parts.
- ◆ Optional cabinet color finish.

#### Applications:


- ◆ Conference room, Classroom, Coffee bar.
- ◆ Small live performance.
- ◆ Church, bus station etc.

#### 应用领域:

- 用于全音域扩声、语言会议系统、高级KTV包房、慢摇吧
- 多功能厅、高级酒店会所
- 流动商演、乐队扩声、舞台返送、前区补声、楼座补声等

#### 技术参数 TECHNICAL PARAMETERS

系统类型	System Type: 2-way 12" full range
频率响应	Frequency Response: 65Hz-20KHz $\pm 3$ dB
指向性	Dispersion(H $\times$ V): 90° Axi-Symmetric
承受功率	Handling Power: 300W(RMS)/600W(PEAK)
灵敏度级	Sensitivity: 97dB
声压级	MAX.SPL.: 123 dB
标称阻抗	Impedance: 8 ohms
吊挂系统	Suspension: Yes
产品尺寸	Dimensions: W400 $\times$ H480 $\times$ D380(mm)
产品净重	Weight(net): 20kg

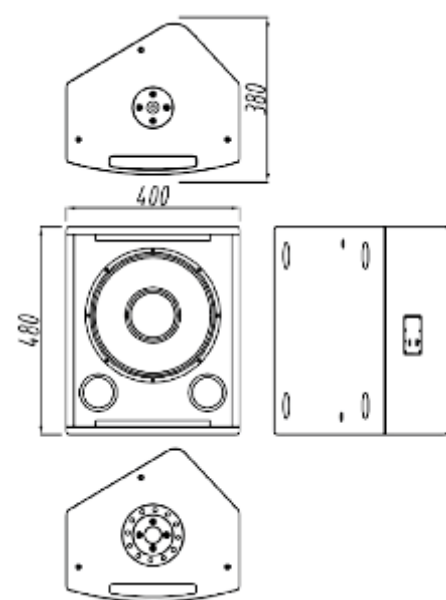

## TD15

### Two-way 15" Coaxial Loudspeaker

#### Features:

- ◆ High quality powerful 15inch coaxial transducer.
- ◆ Extremely clear vocal voice reinforcement.
- ◆ Multifunction installation rigging spare parts.
- ◆ Optional cabinet color finish.

#### Applications:

- ◆ Conference room, Classroom, Coffee bar.
- ◆ Small live performance.
- ◆ Church, bus station etc.

#### 应用领域:

- 用于全音域扩声、语言会议系统、高级KTV包房、慢摇吧
- 多功能厅、高级酒店会所
- 流动商演、乐队扩声、舞台返送、前区补声、楼座补声等

#### 技术参数 TECHNICAL PARAMETERS

系统类型	System Type: 2-way 15" full range
频率响应	Frequency Response: 55Hz-20KHz $\pm 3$ dB
指向性	Dispersion(H $\times$ V): 90° Axi-Symmetric
承受功率	Handling Power: 400W(RMS)/800W(PEAK)
灵敏度级	Sensitivity: 98 dB
声压级	MAX.SPL.: 126dB
标称阻抗	Impedance: 8 ohms
吊挂系统	Suspension: Yes
产品尺寸	Dimensions : W460 $\times$ H580 $\times$ D430(mm)
产品净重	Weight(net): 25kg

